

灯光提醒普通可打印超高频标签



LED Reminded General Printable UHF Tag




基本参数/Basic Parameters

| | |
|---------------------------|--|
| 尺寸/Size (L/OD x W/ID x H) | 100*12*0.2mm(ID & OD圆形内外径/ID & OD means inner & outer diameter of round tag) |
| 面材封装/FaceStock or Housing | 可打印白色PET/Printable White PET |
| 安装方法/Installation | 胶粘/Adhesive |
| 天线工艺/Antenna Type | 铝天线/Aluminum Antenna |
| 技术/Technology | 平面微带/Microstrip Flat Style |
| 离型纸/Backing Liner | 白色格拉辛离型纸/White Glassine Paper Liner |
| 特征/Characters | 普通(General)/灯光提醒(LED Reminded) |


产品特性/Product Feature

| | |
|--------------------------|---|
| 芯片/Chip Model | CAB0 |
| 协议/Protocol | ISO18000-6C GEN2 V2 |
| 频率范围/Operating Frequency | 860-960Mhz |
| 内存/Memory | TID/UID 112bit+ EPC/Block 196bit+ User File_0 with 512bit of data+ Reserve 112bit |
| 读距/Reading Range | 200cm (depends on reader) |
| 应介质/Applicable Surface | 空气(Air-free)/纸板纸皮(Paper Board) |
| 个性化选项/Option | 定制彩色印刷条码文本或个性化编码Custom color printing(Embossing or laser-engraving) with barcode or text & personalization encoding |
| 附加说明/Additional | LED Green |

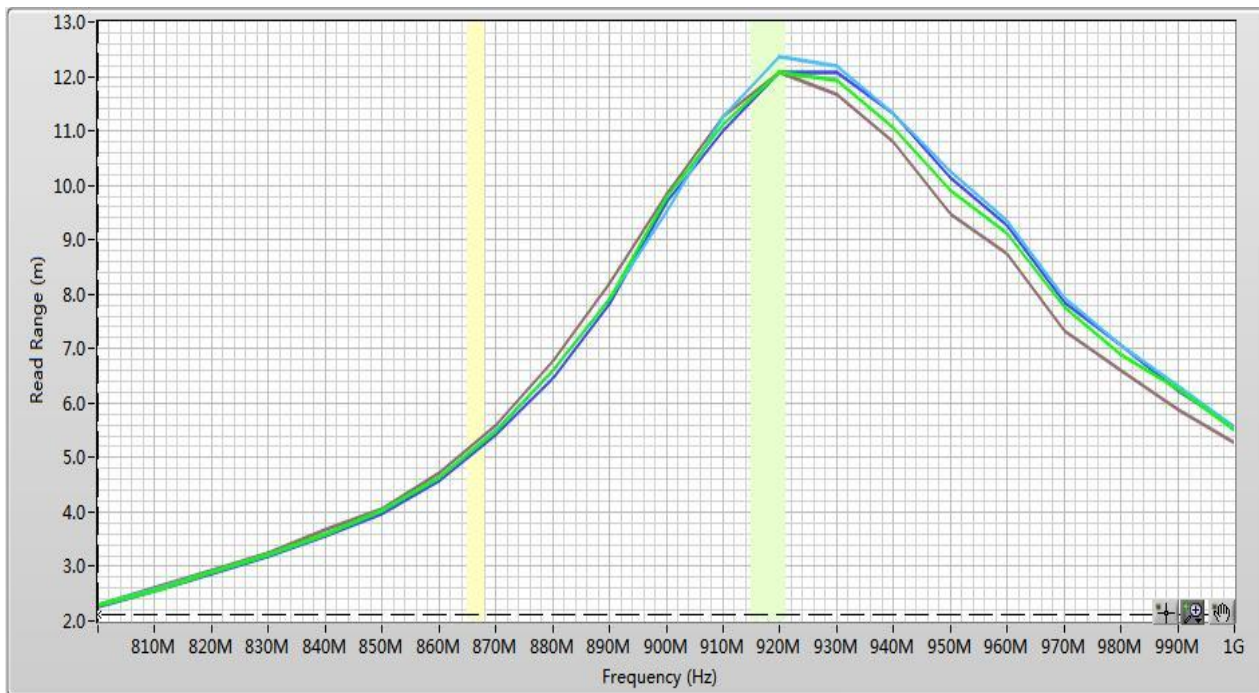

供货方式/Delivery & Supply Format

卷料供货每卷数量1000-3000片(特殊要求见附加说明) Supply in roll with 1000-3000PCS/Roll(Check Additional Note for your specific needs)

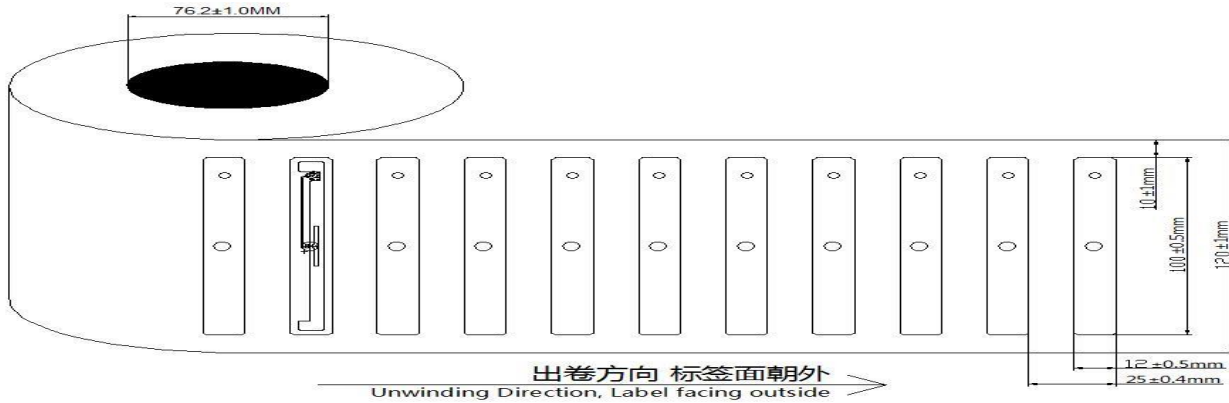

应用场景/Application

普通标签/零售标签/服装标签等主要考虑经济实用, 广泛应用于服装厂, 鞋冒厂, 时装公司, 箱包厂, 以基本产品标识、生产统计、数字化仓储盘点、减少库存、脱销预警、物流供应链、无人零售、商业促销和溯源管理为主要目的, 部分用于防伪防盗管理, 具备可重复利用率。Universal rfid/nfc tag, clothing retail garment/apparel tag mainly concerns in economic and cost-effective, widely used for apparel factory, shoe cap factory, fashion factory, suite luggage factory, mainly purpose is to identify product, production count, digital warehousing and inventory, reducing shrinkage and out-of-stocks, logistic supply chain, unman retail, business promotion and traceability management. Partially used for anti-counterfeiting and anti-theft security monitor with durable & reusable property.



环境参数/Environmental Parameter

| | |
|----------------------------|------------------------------|
| 数据保存/Data EEPROM Retention | 10years |
| 静电保护/ESD Limited Voltage | 2KV |
| 工作温度/Operating Temperature | -35°C - 85°C |
| 储存温度/Storage Temperature | 0°C - 25°C |
| 操作湿度/Relative Humidity | 10%-95%(Variant Performance) |

兼容打印机/Compatible Printers

| | |
|------------|-------------|
| 佐藤/SATO | CL4NX PLUS |
| 斑马/Zebra | ZT411RFID |
| 博思得/POSTEK | TX Series |
| 东芝/TOSHIBA | SX-4T SX-5T |

NOTE:The specification is subject to change without prior notice

批准Approved By:林鸿伟
日期Date: 2021/08/26

制作审核Prepared & Checked By:林阿霞
日期Date:2021/08/26